



life without limit™

For any assistance, please contact your nearest retailer listed at
www.mountainbuggy.com

Model MB1-CLIP5
Issue August 2009

Safety certified: ASTM F833-08



send 102-112 Daniell St, Newtown 6021, Wellington, New Zealand
ph +64 4 380 0833
fax +64 4 380 0137

Designed in New Zealand. Made in China.

installation instructions

duo™ Peg Perego Primo Viaggio™ travel system



installation instructions are for the travel system that fits
the Primo Viaggio™ infant carseat made by Peg Pérégo™ only.

WARNINGS

Check you have the correct travel system for your carseat.

WARNINGS

Do not use this travel system until you have read and understood
the instructions!

WARNINGS

Never leave your child unattended.

WARNINGS

Do not use accessories not designed for your buggy as they may be unsafe.

WARNINGS

Do not leave your baby in carseat (on or off stroller) for long periods of time.

IMPORTANT CHECKS

- Make sure baby is harnessed into carseat using the manufacturer's instructions.
- When fitting carseat onto travel system, ALWAYS keep a steady hand on carseat and baby.
- Check travel system is engaged correctly onto buggy frame and cannot move in any direction. (Refer back to installation instructions to ensure positioning of snap locks are correct).
- Do not use travel system if you are unable to secure carseat or travel system. In this case, contact your store/distributor where the buggy was purchased from, for more help.
- It is recommended that you practise the following instructions without baby in carseat.

PREPARING THE BUGGY



! WARNINGS

ALWAYS put the buggy brake on.

Note: the travel system fits to right hand seat only. Left and right are determined from pusher position.





Note: the buggy seat does not need to be removed to fit the travel system.

1. Temporarily remove sunhood.
2. Unfasten fasteners (x) on either side of right-hand seat and peel fabric back, exposing side tube and centre bar.
3. Recline right-hand seat and loosen strap beneath seat at point A.

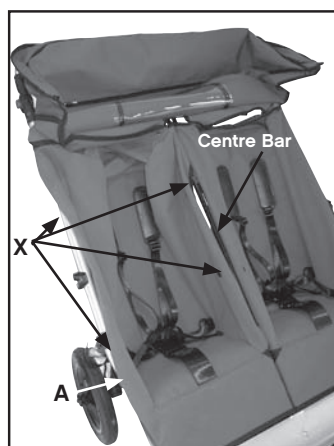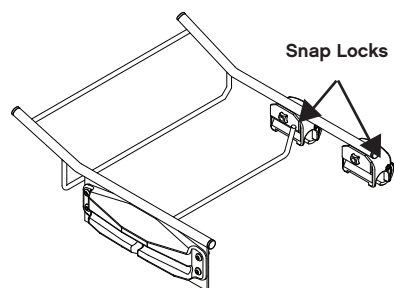


FITTING TRAVEL SYSTEM TO BUGGY

1. Locate centre bar lug on buggy and slide the travel system sliding plate down the centre bar of frame until groove (X) in sliding plate locks onto centre bar lug.
2. Open snap locks and press travel system onto side tube of frame so that the top snap lock is directly above sunhood lug.
3. Close both snap locks down flat, making sure you hear the lock "click" indicating they are fully locked.
4. Reattach sunhood.

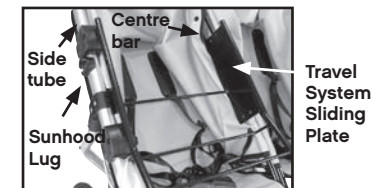

FITTING CARSEAT ONTO TRAVEL SYSTEM

1. Place carseat in travel system so that infant is facing away from buggy handle bar.
2. Ensure the carseat latches have clicked onto the travel system bars A & B. Bar C fits into carseat slot.

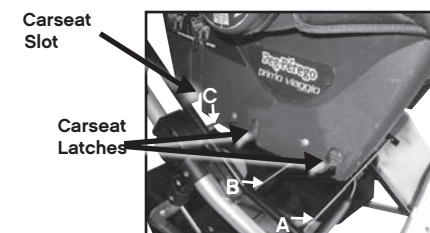

REMOVING CARSEAT FROM TRAVEL SYSTEM

1. Pull up carseat latch handle and lift carseat off travel system.

REMOVING TRAVEL SYSTEM FROM BUGGY

1. Remove sunhood.
2. Open both snap locks by lifting up levers and lift travel system off buggy.