



terrain urban

PEG PÉREGO DOUBLE/TRIPLE CARSEAT CLIP INSTRUCTIONS

Model: primo viaggio

IMPORTANT, KEEP FOR FUTURE REFERENCE

The stroller seat does not need to be removed to fit Carseat Clip.

These instructions are for the **Carseat Clip** that fits the primo viaggio infant car seat made by Peg Pérego **only**. This **Carseat Clip** fits the following model strollers:

URBAN

DOUBLE U2204



URBAN

TRIPLE U3204



TERRAIN

DOUBLE T2204



TERRAIN

TRIPLE T3204



⚠️ WARNING


- Check you have the Peg Pérego: model primo viaggio car seat for this Carseat Clip.
- Do not use this Carseat Clip until you have read and understood the instructions!
- Incorrect use can mean serious injury or death to an infant!
- Do not use this accessory on any stroller other than those listed, as it may be unsafe.
- Never leave your child unattended.
- Check that car seat and Carseat Clip are secure and cannot move forward, back, sideways or upwards.
- Make sure infant is harnessed into the car seat using the car seat manufacturer's instructions.
- Do not leave baby in car seat (on or off stroller) for long periods of time.

STAGE 1

I. Temporarily Remove Sunhood

ALL MODELS

The sunhood wires need to be removed from sunhood joints to allow Carseat Clip to be fitted. These wires are re-attached to stroller once Carseat Clip has been fitted.

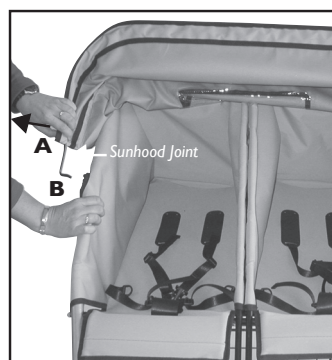


- 1 Pull support wire out of sunhood joint **A** while pushing against stroller frame with other hand **B**. NB: This operation is child proof and therefore requires a degree of force.
- 2 Repeat step (1) on other side.
- 3 Fold sunhood back to rest on handlebar.

STAGE 2

I. Partial Seat Unfastening

ALL MODELS

Note: The Carseat Clip fits to right hand seat only. Left and right are determined from pusher position.

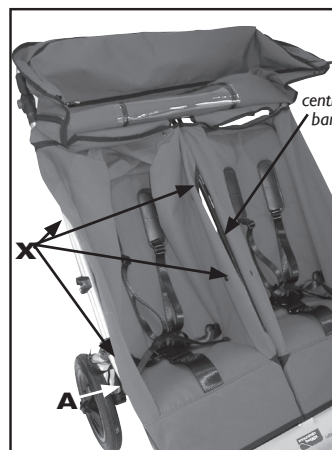

- 1 Unfasten fasteners (**x**) either side of right-hand seat and peel fabric back, exposing right-hand side tube and centre bar.

- 2 Recline right-hand seat slightly.


URBAN

- 3 Loosen the strap beneath seat at point **A**.

STAGE 2

Fitting Carseat Clip to Frame

NB: The Carseat Clip comes assembled for the Urban model.

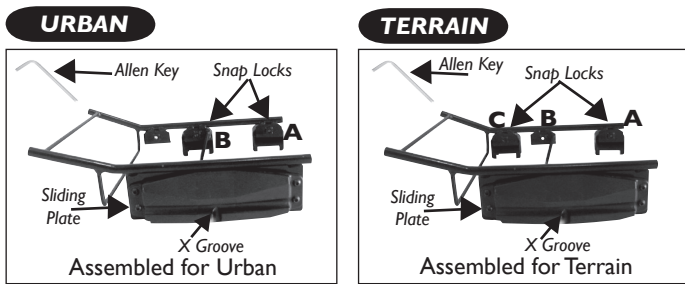

Terrain Model Only


Before placing **Carseat Clip** on stroller frame, the Snap Lock at point **B** needs to be removed and placed at point **C**.

- (i) Using Allen Key supplied, remove Snap Lock at point **B** by rotating screw in an anti-clockwise direction.
- (ii) Using Allen Key supplied, place removed Snap Lock at point **C** by rotating screw in a clockwise direction until screw is tight and Snap Lock is secure.

TERRAIN AND URBAN MODELS

- 1** Open both Snap Locks by lifting up levers.


OPEN POSITION

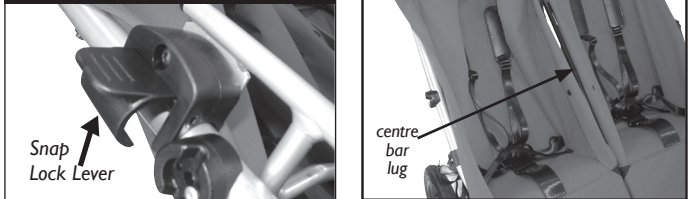


- 2** Locate centre bar lug on stroller and slide the **Carseat Clip** Sliding Plate down the centre bar of frame until Groove (X) in Sliding Plate locks onto centre bar lug.



URBAN



TERRAIN



- 3** Press **Carseat Clip** on to right-hand side tube of frame so that the top Snap Lock is directly above Sunhood Joint.


- 4** Close both Snap Locks down flat, making sure you hear the lock "click" indicating they are fully locked.

CLOSED POSITION



Refitting Sunhood

Place sunhood in position and push one side of wire into plastic joint. Repeat on other side by pulling wire away from frame at the top. Fasten sunhood fabric to stroller frame and seat, near handle bar.




STAGE 3

Fitting Car Seat onto Carseat Clip

! WARNING

- Make sure infant is harnessed into the car seat using the car seat manufacturer's instructions.
- When fitting car seat onto Carseat Clip, **ALWAYS KEEP A STEADYING HAND ON CAR SEAT AND INFANT.**
- **IT IS RECOMMENDED THAT YOU PRACTISE THE FOLLOWING INSTRUCTIONS WITHOUT INFANT IN CAR SEAT.**

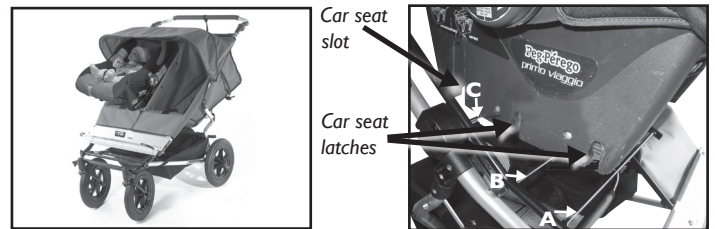

Pictured on Urban

- 1** Place car seat in **Carseat Clip** so that infant is facing away from stroller handle bar.
- 2** Ensure the car seat latches have clicked on to the **Carseat Clip** bars **A** & **B**. Bar **C** fits into car seat slot.

! WARNING

- Check **Carseat Clip** is located correctly on to stroller frame. Refer back to diagrams to ensure positioning of Snap Locks are correct.
- Check car seat and **Carseat Clip** are secure and cannot move forward, back, sideways or upwards.
- Do not use **Carseat Clip** if you are unable to secure car seat or **Carseat Clip**. In this case contact store where stroller was purchased or distributor for your country, for more help.

STAGE 4

Removing Car Seat from Carseat Clip

- 1** Pull up car seat latch handle to release car seat from **Carseat Clip** bars.
- 2** Lift car seat off **Carseat Clip**.



STAGE 5

Removing Carseat Clip from Stroller

- 1** Remove sunhood wires (refer Stage 1).
- 2** Open both Snap Locks by lifting up levers.
- 3** Lift **Carseat Clip** off stroller frame
- 4** Re-attach sunhood wires (refer Stage 3).
- 5** Re-attach two middle fasteners on both sides of seat.

URBAN

- 6** Tighten strap beneath seat (refer Stage 1).