


TERA

urban

UNIVERSAL CARSEAT CLIP INSTRUCTIONS

IMPORTANT, KEEP FOR FUTURE REFERENCE

These instructions are for the Carseat Clip which fits the following model strollers:

TERRAIN

Single - T1204


URBAN

Single - U1204




⚠ WARNING

- Do not use this Carseat Clip until you have read and understood the instructions!
 - Check you have the correct Carseat Clip for your model stroller. Model name/number is on cloth label sewn into fabric of Carseat Clip and on packaging.
 - Never leave your child unattended.
 - This Carseat Clip fits most infant car seats. Check car seat compatibility with Authorized Dealer or Distributor.
 - Do not use accessories not designed for your stroller as they may be unsafe.
 - Do not leave baby in car seat (on or off stroller) for long periods of time.
-
- The Sunhood and Seat need to be removed from stroller before fitting Carseat Clip.
 - Store items removed in a dry safe place.

STAGE I

Removing Sunhood

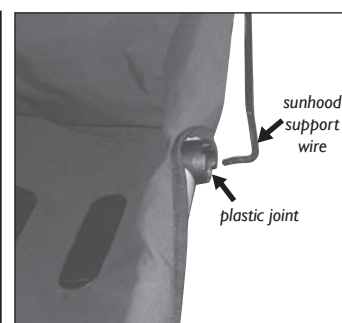
BOTH MODELS


1 Pull support wire out of sunhood joint, while pushing against frame. Note: This operation is child proof and therefore requires a degree of force.

2 Repeat step (1) on other side.

3 Unfasten the sunhood fabric from the stroller frame and seat near the handle bar.

Removing Seat

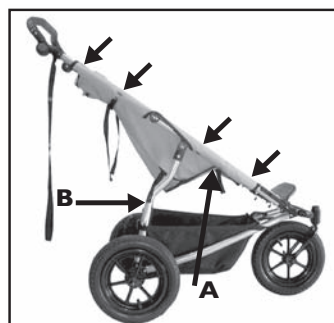
BOTH MODELS

1 Unfasten seat from frame along side tubes.


URBAN

2 Unfasten strap underneath seat at point **A**. Unfasten frame straps at point **B**.

TERRAIN

3 Push seat forward, then slide fabric up seat support wire.

4 Remove seat support wire from stroller frame at **C** and **D**.

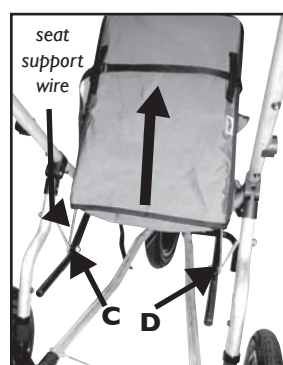


STAGE 2


Fitting Carseat Clip to Stroller Frame

Fitting Fabric to Frame

To fit fasteners to frame of stroller, identify the diagram for your model, and then follow the instructions.



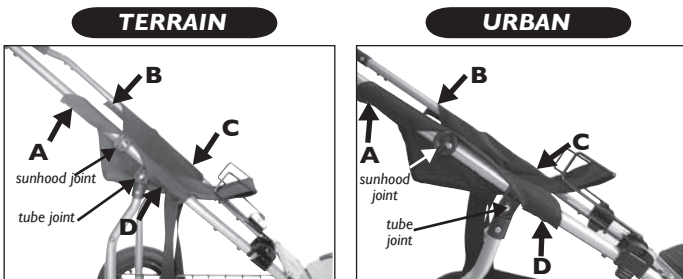


1 Attach fasteners on fabric to fasteners on frame at points **A, B, C & D**. Fasteners **A+B** are first studs above sunhood joint. Fasteners **C+D** are below tube joint.

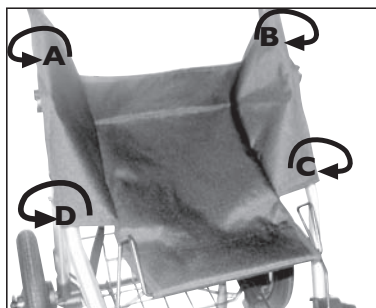

2 Ensure fabric passes over and around frame tubes.

Fitting Snap Locks to Frame

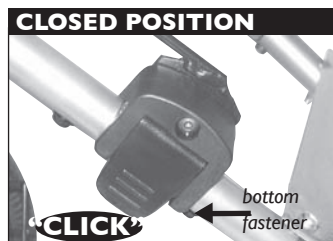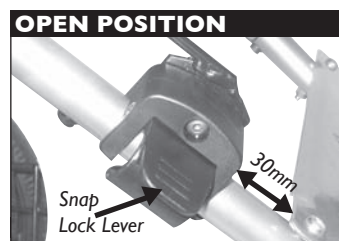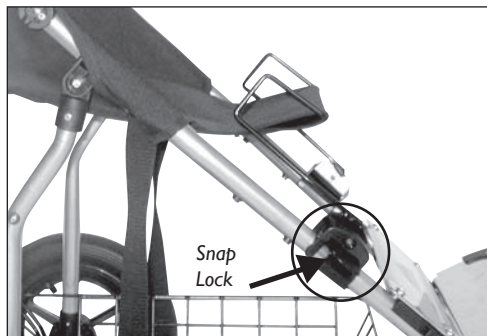

3 Open the 2 Snap Locks by lifting lever up.

4 Place Snap Locks onto frame directly above bottom fastener on both sides of stroller.

5 Close both Snap Locks down flat, making sure you hear the lock "Click" indicating they are fully locked.

STAGE 3


Fitting Car Seat onto Carseat Clip

⚠ WARNING

- Ensure baby is correctly and firmly strapped into carseat, before placing onto Carseat Clip (check car seat manufacturer's instructions).
- When fitting car seat onto Carseat Clip, ALWAYS keep a steadying hand on car seat and baby, until Carseat Clip strap is securely fastened.
- Be aware of danger time between placement of car seat onto Carseat Clip and point when Carseat Clip strap is secured.
- It is recommended that you practise the following instructions without baby in car seat.

1 Place car seat in Carseat Clip so that baby faces stroller handle bar.

Identify diagram for your model, and then follow the instructions.

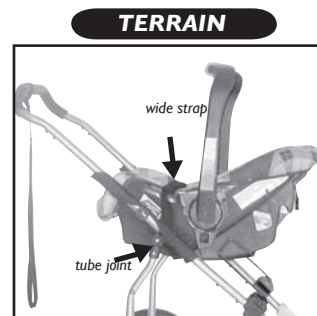


2 Pass wide straps attached to Carseat Clip around outer side of frame directly below tube joint on both sides of stroller.



3 Pass wide straps attached to Carseat Clip around outer side of frame directly below sunhood joint on both sides of stroller.

4 Pass wide strap upwards and through slots provided on each side of car seat. (The slots are the same openings as used for car seat belt).

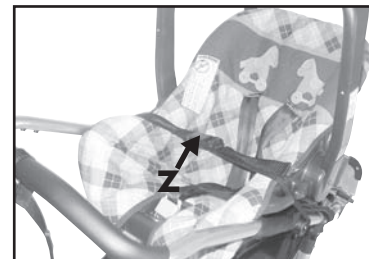

5 Buckle wide strap across top of car seat at point Z and tighten firmly by pulling on free end of strap.

⚠ WARNING

- Check car seat fits into Carseat Clip and buckle is firmly fastened.
- Check Carseat Clip is located correctly onto stroller frame. Refer back to diagrams to ensure positioning of fasteners and Snap Locks are correct.
- Do not use Carseat Clip if you are unable to secure car seat or Carseat Clip. In this case, contact store where stroller was purchased or distributor for your country, for more help.
- Always remove Carseat Clip before collapsing Stroller.

Removing Car Seat from Carseat Clip

1. Unbuckle Carseat Clip buckle.
2. Remove straps from slots on car seat.
3. Lift car seat off Carseat Clip.

Removing Carseat Clip from Frame

1. Open 2 Snap Locks and take Snap Locks off frame tube.
2. Unfasten 4 fasteners on frame and lift Carseat Clip off stroller frame.