



terrain urban

## SINGLE CARSEAT CLIP INSTRUCTIONS - GRACO® model: SnugRide®

### IMPORTANT - KEEP FOR FUTURE REFERENCE

**The stroller seat does not need to be removed to fit Carseat Clip.**

These instructions are for the Carseat Clip which fit the following model strollers:

#### TERRAIN

Single - T1204



#### URBAN

Single - U1204




### ⚠ WARNING

- Do not use this Carseat Clip until you have read and understood the instructions!
- Incorrect use can mean serious injury or death to an infant!
- Do not use accessories not designed for your stroller as they may be unsafe.
- Never leave your child unattended.
- Check you have the correct Carseat Clip for your car seat.
- Check that car seat and Carseat Clip are secure and cannot move forward, back, sideways or upwards.
- Make sure infant is harnessed into the car seat using the car seat manufacturer's instructions.
- Do not leave baby in car seat (on or off stroller) for long periods of time.

## STAGE ONE

### 1. Temporarily Remove Sunhood


The sunhood wires need to be removed from sunhood joints to allow Carseat Clip to be fitted. These wires are re-attached to stroller once Carseat Clip has been fitted.

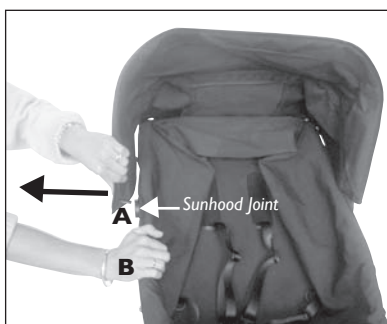

#### ALL MODELS

- 1 Pull support wire out of sunhood joint **A**. This operation is child proof and therefore requires a degree of force. To assist in pulling support wire out, push against stroller frame with other hand **B**.
- 2 Repeat step (1) on other side.

### 2. Partial Seat Unfastening

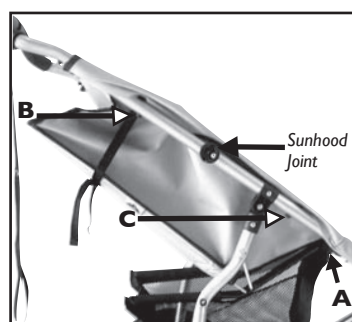

#### ALL MODELS

- 1 Unfasten two middle fasteners on both sides of stroller (at B & C) and peel fabric back, exposing frame.

#### URBAN

- 2 Loosen the strap beneath seat at point A.
- 3 Recline seat slightly.


## STAGE TWO

### Fitting Carseat Clip to Frame

The Carseat Clip comes assembled for Urban model.

#### TERRAIN ONLY

Before placing Carseat Clip on stroller frame, the Snap Locks at points **B** need to be removed and placed at points **C** (on both sides).

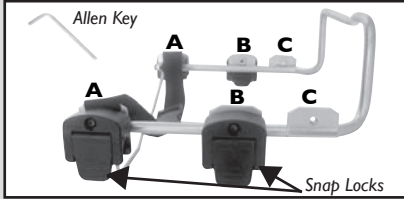


(i) Using Allen Key supplied, remove Snap Locks at points B (both sides) by rotating screw in an anti-clockwise direction.

(ii) Using Allen Key supplied, place removed Snap Locks at points C (both sides) by rotating screw in a clockwise direction until screw is tight and Snap Locks are secure.


#### TERRAIN & URBAN

- 1 Open all four Snap Locks by lifting up levers.
- 2 Press **Carseat Clip** on to frame so that **TOP** Snap Locks are directly above sunhood joints (on both sides).


#### TERRAIN




#### URBAN



- 3 Close all Snap Locks down flat, making sure you hear the lock "click" - indicating they are fully locked.

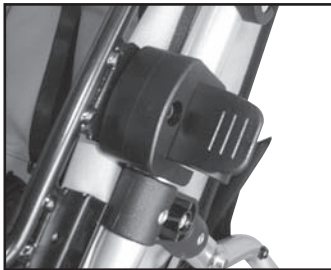

OPEN POSITION

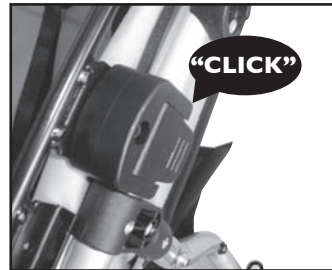

CLOSED POSITION

## WARNING

- Make sure infant is harnessed into the car seat using the car seat manufacturer's instructions.
- When fitting car seat onto Carseat Clip, ALWAYS KEEP A STEADYING HAND ON CAR SEAT AND INFANT, until Carseat Clip strap is securely fastened.
- Check car seat fits into Carseat Clip and buckle is firmly fastened.
- Check Carseat Clip is located correctly on to stroller frame. Refer back to diagrams to ensure positioning of snap locks are correct.
- Check car seat and Carseat Clip are secure and cannot move forward, back, sideways or upwards.
- Do not use Carseat Clip if you are unable to secure car seat or Carseat Clip. In this case contact store where stroller was purchased or distributor for your country, for more help.
- IT IS RECOMMENDED THAT YOU PRACTICE THE FOLLOWING INSTRUCTIONS WITHOUT INFANT IN CAR SEAT.

## STAGE THREE

### Re-Attaching Sunhood Wires


- 1 Push sunhood wires back into sunhood joints (refer Stage One)

### Fitting Car Seat onto Carseat Clip

#### Pictured on Urban



- 1 Place car seat in **Carseat Clip** so that infant is facing the stroller handle bar.



- 2 Ensure the car seat latch has clicked on to the **Carseat Clip** bar.

Carseat Clip Bar

Car Seat Latch



- 3 Pass wide straps on each side of **Carseat Clip** upward and through slots provided on each side of car seat. (The slots are the same openings as used for car seat belt.)



- 4 Buckle the wide strap across top of car seat and tighten firmly by pulling on free end of strap.

## STAGE FOUR

### Removing Car Seat from Carseat Clip



- 1 Unbuckle **Carseat Clip** buckle.
- 2 Remove straps from slots on car seat.
- 3 Pull up car seat latch handle to release car seat from Carseat Clip bar.
- 4 Lift car seat off Carseat Clip.

## STAGE FIVE

### Removing Carseat Clip from Stroller

- 1 Remove sunhood wires (refer Stage One).
- 2 Open all four Snap Locks by lifting up levers.
- 3 Lift Carseat Clip off stroller frame.
- 4 Re-attach sunhood wires (refer Stage Three).
- 5 Re-attach two middle fasteners on both sides of stroller.

#### URBAN

- 6 Tighten strap beneath seat (refer Stage One).